

Y-3007

Genel Özellikler / General Specifications

Ölçü / Dimensions: G 2", 2 1/2"

Anma Basıncı / Nominal Pressure: 225 psi (16 bar)

Çalışma Sıcaklığı / Working Temperature: +4°C/+80°C

Standartlar / Standards

Sertifikalar / Certificate: TSE



*Kaplın kapak fiyata dahil değildir.

*The coupling and cap are not included in the price.



Storz Kaplin Ve Zincirli Kapak
Storz Coupling and Chain Cap

Y-3007



Ürün sayfası için
okutun

Scan for
product page



İtfaiyenin su almak maksadıyla katlarda yangın dolapları yanında, yakınında veya yangın kaçış koridorlarında kullanılır. Yüksek katlı binalarda en az her iki katta bir kullanılması zorunludur.

In order to supply the fire department with water it is mounted in floors next to fire cabinets, nearby or near the fire escape corridor. In high-rise buildings it is mandatory to have one in every two floors.



Ölçüler Dimension

	2" - DN50	2 1/2" - DN65
A	150 mm	185 mm
B	59,5 mm	75 mm
C	82 mm	99 mm
D	47 mm	66 mm
E	16 mm	17 mm
Ağırlık/ Weight (gr)	1572	1913

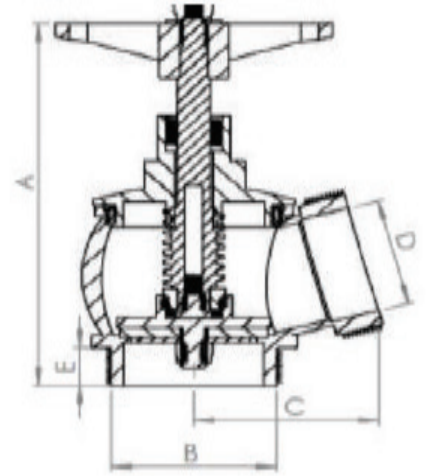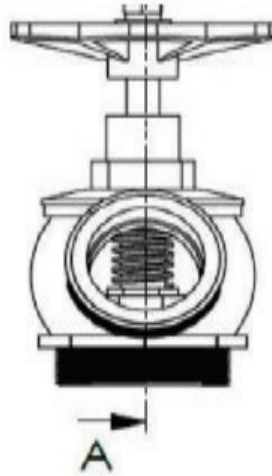

A-A



Malzeme Özellikleri Material Specifications

No	Parça Adı/Part Name	Malzeme/Material
1	Gövde+Kapak/Body+Bonnet	Piring/Brass
2	Klape/Clapper	Piring/Brass
3	O-Ring/O-Ring	Vulkanize Kauçuk/Vulcanized Rubber